

$\lambda/8$ WP (WHICH PERFORMS $\lambda/4$ PHASE-SHIFTING BY DOUBLE PASSING) WITH CRYSTAL AXES OF 0° OR 90° တ် PD2 (WHICH IS PHASE-SHIFTED \nearrow BY π /2 FROM PD1)


SIGNAL INTENSITY

FIG. 1B




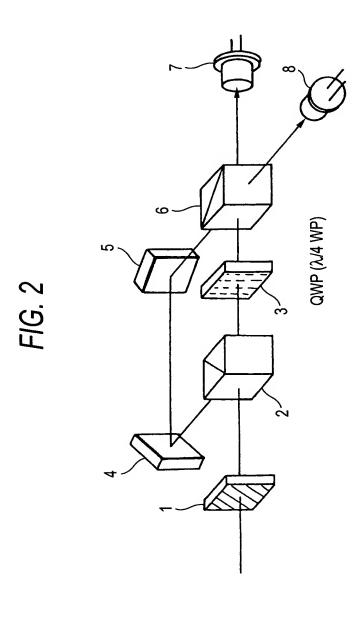

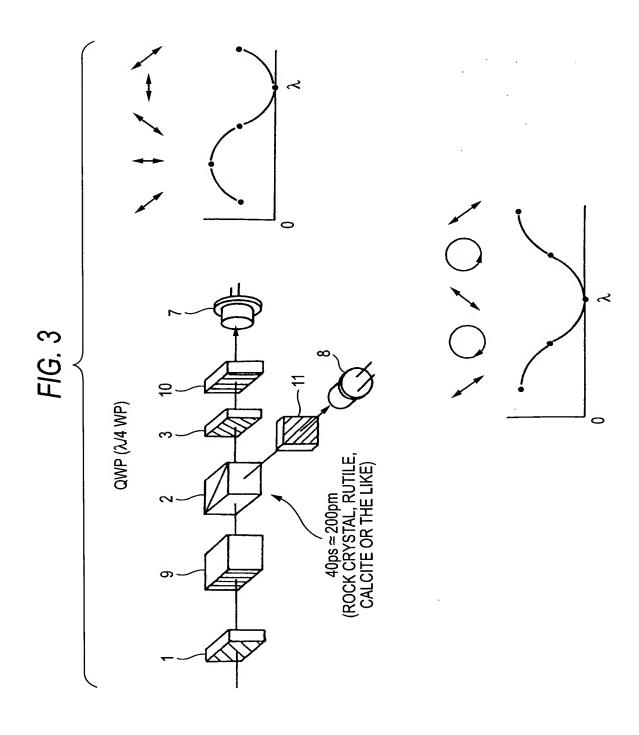

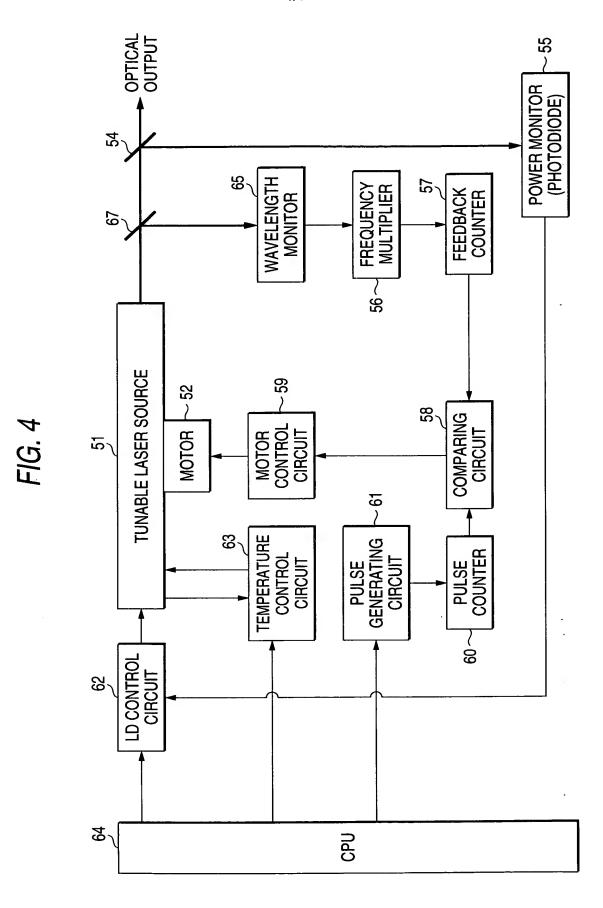




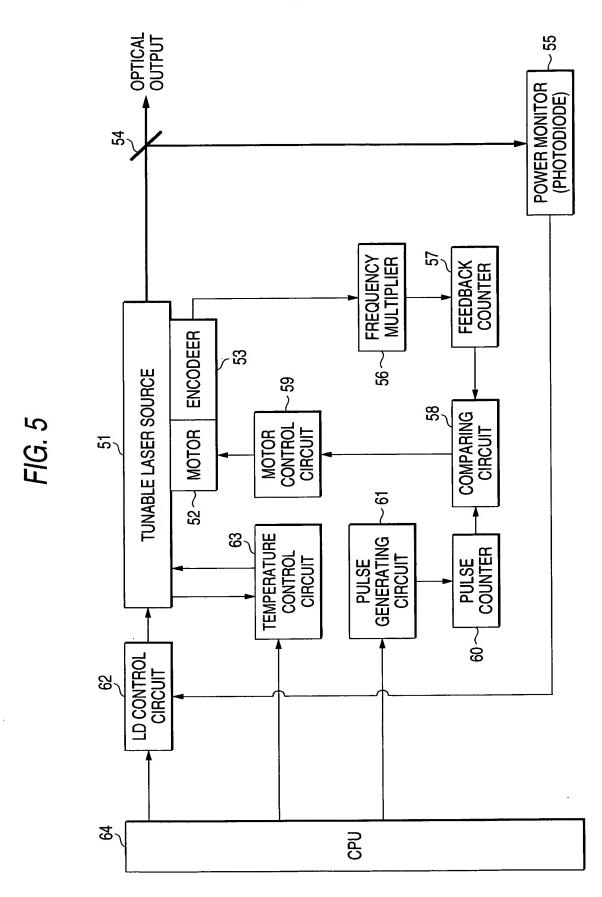

Matter No.: 14815-014001 Page Applicant(s): Keisuke Asami et al. WAVELENGTH MONITOR AND MOTOR DRIVING AND CONTROLLING DEVICE

FIG. 6



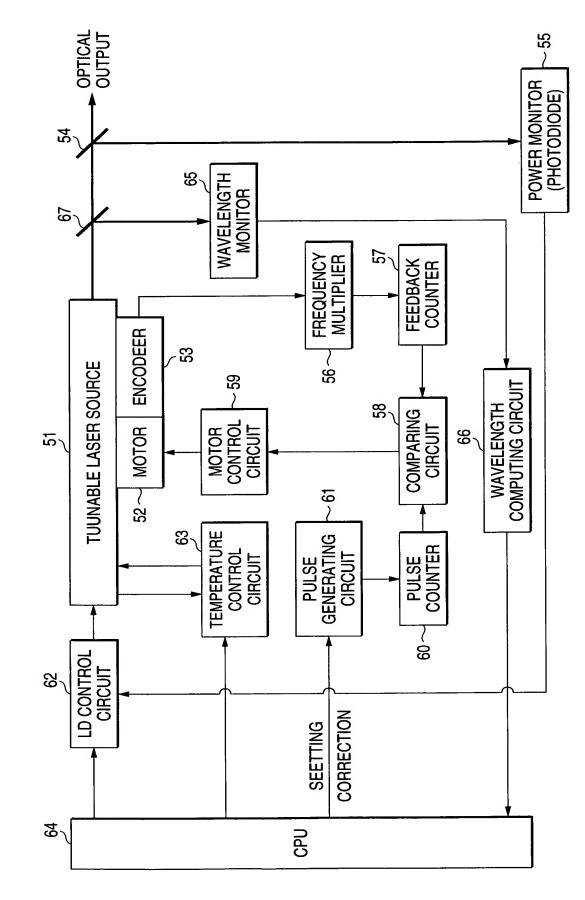

CONTROLLING DEVICE

7/7

